


ヒートン (鉄)

材質 : 鉄
表面処理: ユニクロメッキ

	A	B	C	L
No.000	1.6	15	7.2	6
No.00	1.8	17.5	8.8	7
No.0	2	21	10	8
No.2	2.3	22.5	11	9
No.4	2.5	28	13.5	10
No.6	3	34	15.5	13
No.8	3.5	41	19	16
No.10	4	47	22	17
No.12	4.5	52	24.5	19
No.14	5	59	26	24
No.16	6	65	29	26
No.18	7	81	33	30

(単位:mm)

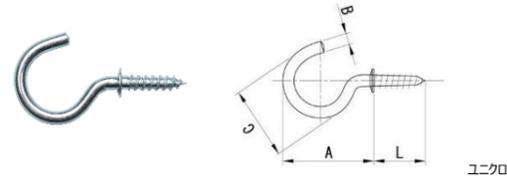


洋灯吊 (鉄)

材質 : 鉄
表面処理: ユニクロメッキ

	A	B	C	L
13	13	2	10	9
16	16	2.3	12.5	10
20	20	2.5	16	12
22	22	2.5	17	13
25	25	3	20	14
28	28	3.2	21.5	16
32	32	3.5	25	17
35	35	4	27.5	19
38	38	4	29.5	19
45	45	4.2	35	22
50	50	4.8	40	25

(単位:mm)

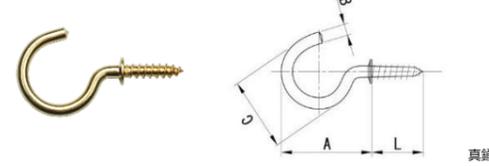


洋灯吊 (真鍮)

材質 : 真鍮
表面処理: キルス

	A	B	C	L
13	13	2	10	9
16	16	2.2	12	10
20	20	2.4	15	12
22	22	2.5	17	13
25	25	2.8	19.5	14
28	28	3.2	21.5	16
32	32	3.5	25	17
35	35	3.9	26.5	19
38	38	3.9	29	19
45	45	4.2	35	22
50	50	4.8	40	25

(単位:mm)

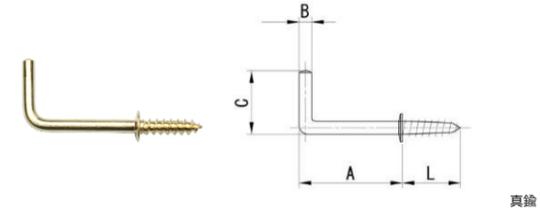


洋折 (真鍮)

材質 : 真鍮
表面処理: キルス

	A	B	C	L
13	13	2	9.5	9
16	16	2.2	10	10
20	20	2.4	12.5	12
22	22	2.5	13.5	13
25	25	2.8	16	14
28	28	3.2	19	16
32	32	3.5	21	17
35	35	3.9	22.5	19
38	38	3.9	23	19
45	45	4.2	25	22
50	50	4.8	28	25

(単位:mm)

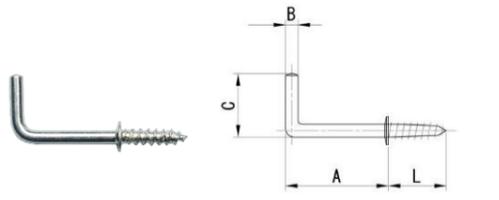


洋折 (鉄)

材質 : 鉄
表面処理: ユニクロメッキ

	A	B	C	L
13	13	2	9	9
16	16	2.3	10.5	10
20	20	2.5	13	12
22	22	2.5	14.5	13
25	25	3	15.5	14
28	28	3.2	18.5	16
32	32	3.5	21	17
35	35	4	23	19
38	38	4	24	19
45	45	4.2	25	22
50	50	4.8	27.5	25

(単位:mm)

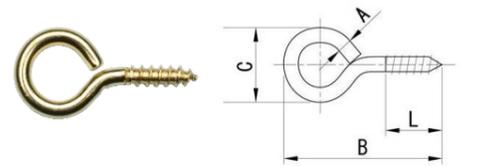


ヒートン (真鍮)

材質 : 真鍮
表面処理: キルス

	A	B	C	L
No.00	1.6	15	7.2	7
No.0	1.85	20.5	9.2	9
No.2	2.15	23	11	9
No.4	2.45	25	12	12
No.6	2.8	29	15	12
No.8	3.3	34	16	16
No.10	3.9	42	20	18
No.12	4.4	46.5	22	19
No.14	4.7	54	25	20
No.16	5.5	64.5	27	21

(単位:mm)

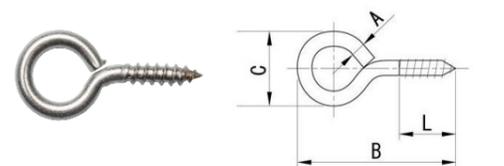


ヒートン (ステンレス)

材質 : ステンレス

	A	B	C	L
No.00	1.6	15	7.2	7
No.0	1.85	20.5	9.2	9
No.2	2.15	23	11	9
No.4	2.45	25	12	11
No.6	2.8	29	15	11.5
No.8	3.3	34	16	15.5
No.10	3.9	42	20	17.5
No.12	4.4	46.5	22	19
No.14	4.7	54	24.5	20
No.16	5.5	64.5	27	21

(単位:mm)

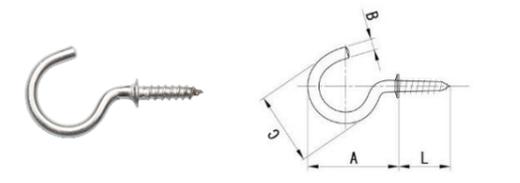


洋灯吊 (ステンレス)

材質 : ステンレス

	A	B	C	L
16	16	2.2	12	10
20	20	2.4	15	12
22	22	2.5	17	13
25	25	2.8	19.5	14
28	28	3.2	21.5	16
32	32	3.5	25	17
35	35	3.9	26.5	19
38	38	3.9	29	19
45	45	4.2	35	22
50	50	4.8	40	25

(単位:mm)

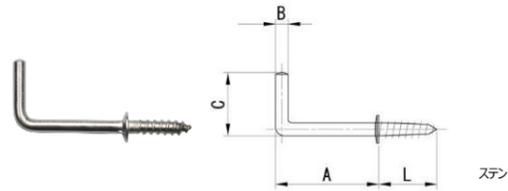


洋折 (ステンレス)

材質 : ステンレス

	A	B	C	L
16	16	2.2	10	10
20	20	2.4	12.5	12
22	22	2.5	13.5	13
25	25	2.8	16	14
28	28	3.2	19	16
32	32	3.5	21	17
35	35	3.9	22.5	19
38	38	3.9	23	19
45	45	4.2	25	22
50	50	4.8	28	25

(単位:mm)

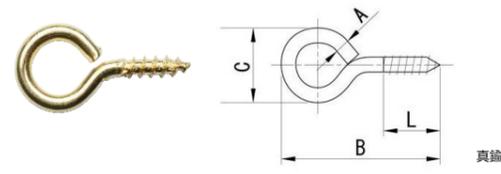


ベビーヒートン (真鍮)

材質 : 真鍮

表面処理 : キルス

	A	B	C	L
No.S	1.85	20.5	9.2	9
No.K	2.15	23	11	9
No.T	2.45	25	12	12
No.C	2.8	29	15	12
No.M	3.3	34	16	16

(単位:mm)

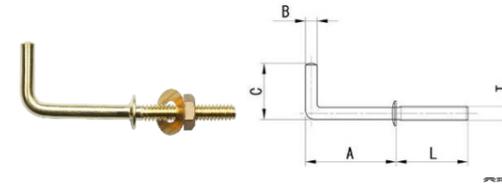


ナット付洋折 (真鍮)

材質 : 真鍮

表面処理 : キルス

	A	B	C	T	L
22	22	2.5	14	M3.5×0.5	18
25	25	3.2	17	M4×0.7	22
32	32	4.2	21	M5×0.8	25
38(M5)	38	4.2	23	M5×0.8	25
38(M6)	38	5.2	25	M6×1.0	25

(単位:mm)

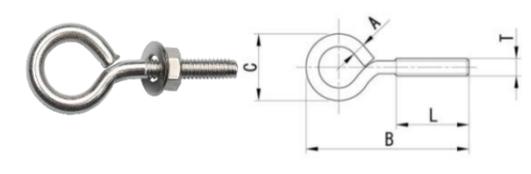


ナット付ヒートン (ステンレス)

材質 : ステンレス

	A	B	C	T	L
No.6	2.6	34	14.5	M3×0.5	15
No.8	3.3	39	16.5	M4×0.7	16
No.10	4	49	19	M4×0.7	22

(単位:mm)

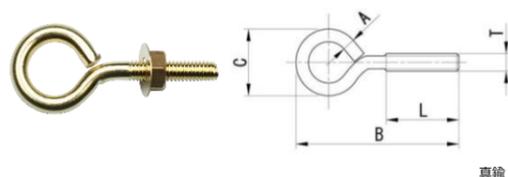


ナット付ヒートン (真鍮)

材質 : 真鍮

表面処理 : キルス

	A	B	C	T	L
No.6	2.6	34	14.5	M3×0.5	15
No.8	3.45	39	16.5	M4×0.7	16
No.10	4	49	20	W3/16	20
No.12	4.35	53	22	M5×0.8	23

(単位:mm)

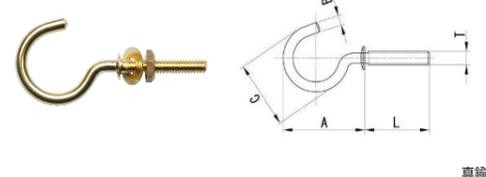


ナット付洋灯吊 (真鍮)

材質 : 真鍮

表面処理 : キルス

	A	B	C	T	L
22	22	2.5	17	M3.5×0.5	18
25	25	3.2	20	M4×0.7	22
32	32	4.2	26	M5×0.8	26
38(M5)	38	4.2	29	M5×0.8	25
38(M6)	38	5.2	29	M6×1.0	25

(単位:mm)

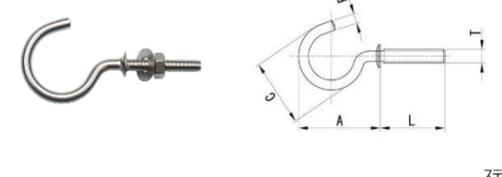


ナット付洋灯吊 (ステンレス)

材質 : ステンレス

	A	B	C	T	L
22	22	2.5	17	M3×0.5	16
25	25	3.2	19	M3×0.5	19
32	32	3.9	25	M4×0.7	20
38	38	3.9	29	M4×0.7	23

(単位:mm)

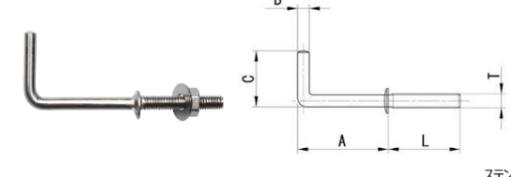

ナット付洋折 (ステンレス)

材質 : ステンレス

	A	B	C	T	L
22	22	2.5	14	M3×0.5	16
25	25	3.2	16	M3×0.5	19
32	32	3.9	21	M4×0.7	20
38	38	3.9	23	M4×0.7	23

(単位:mm)